



Client
Statoil ASA

General Enquiries: Mobile: +47 97004647

Contractor
VBMS (UK) Ltd
Hertford Road
Hoddesdon
Hertfordshire
EN11 9BX
www.vbms.com


December 05th, 2016

NOTICE TO MARINERS

PLGR Operations.


Notice is hereby given that **VBMS** will carrying out PLGR operation works as part of the preparations for the installation of the export and array cables of Dudgeon Offshore Wind Farm.

The PLGR involves the vessel **Anna-B** (towing a grapnel train arrangement over the seabed). The grapnel wire pulling the grapnel train shall have a length of at least 4-5 times the water depth. The vessel follows the cable route to hook in and recover all small debris like lost fishing nets, ropes and wires from the seabed, following the centre line of the planned export cable route with a tolerance of 10m to both sides of the export cable RPL, giving a 20m corridor. See sketch of typical PLGR general arrangement below.

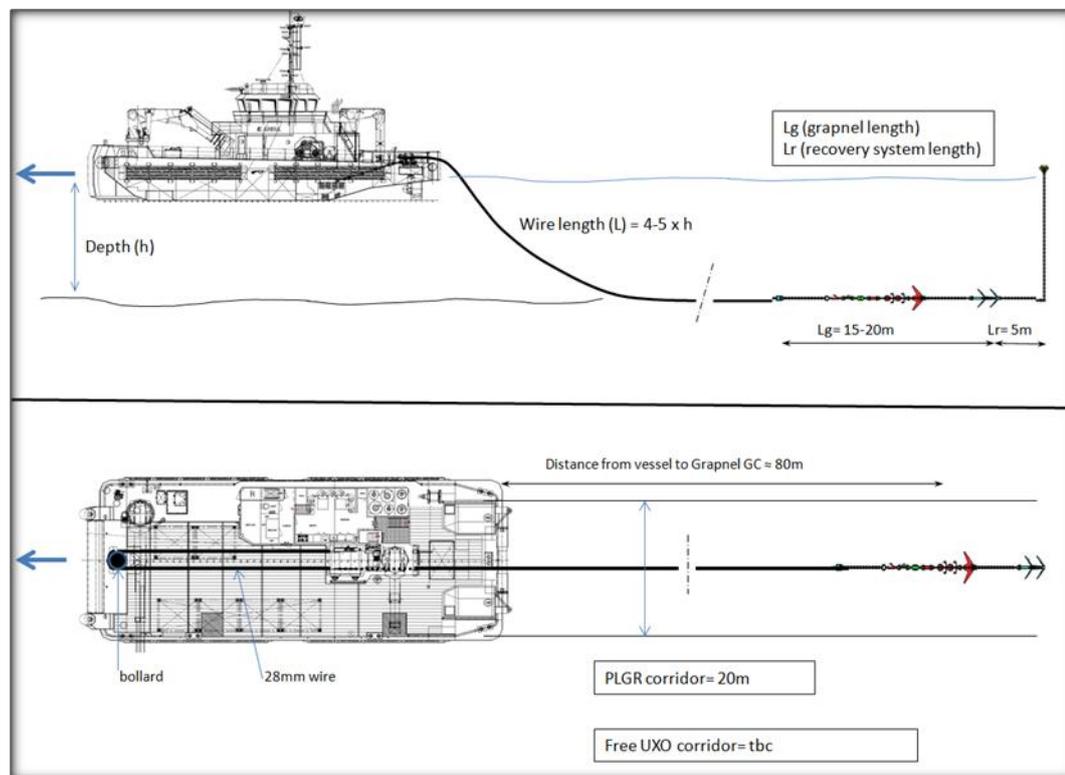

The **Anna-B** will arrive on location at or around 09-02-2016. The vessel will be working in the area for an expected duration of maximum 28 days.

The following map and coordinates, shows an overview of the project area.

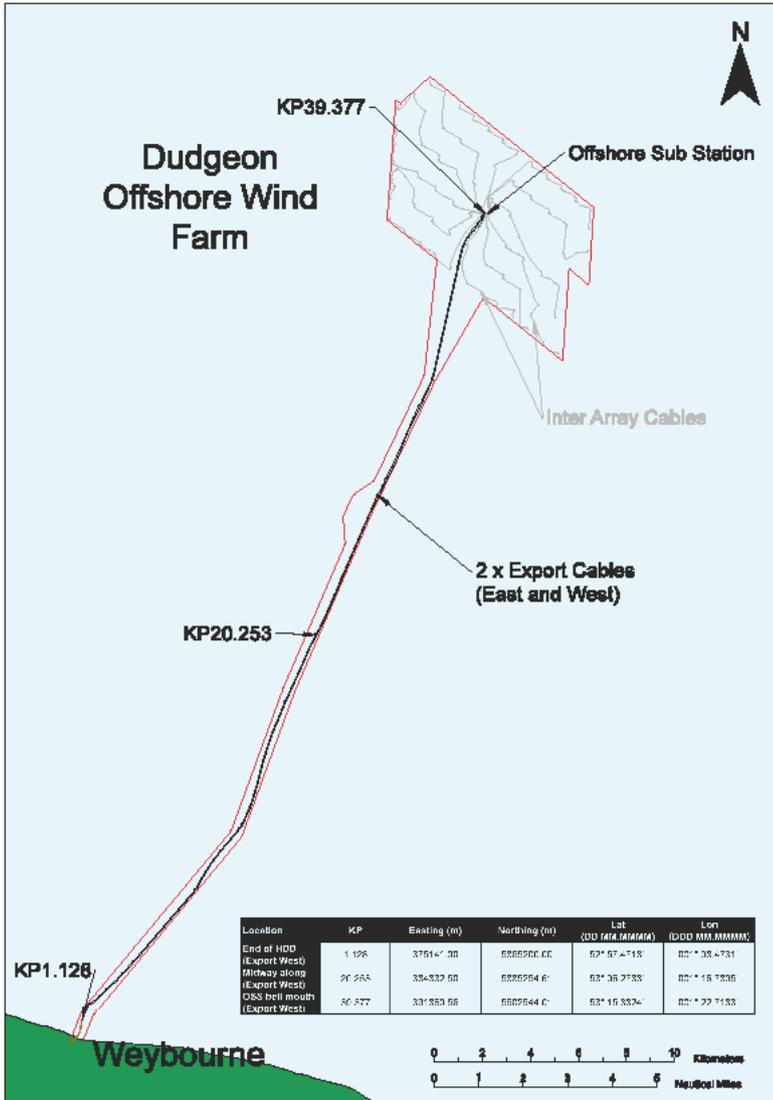

The boundaries of the working area are indicated in the figure below, the route is as following From KP 1,128 until KP 39,377.

Location	KP	Easting (m)	Northing (m)	Lat (DD MM.MMMM)	Lon (DDD MM.MMMM)
End of HDD (Export West)	1,128	375141,00	5869200,00	52° 57.4718'	001° 08.4731'
Midway along (Export West)	20,253	384832,50	5885294,61	53° 06.2788'	001° 16.7805'
OSS bell mouth (Export West)	39,377	391860,56	5902944,01	53° 15.8824'	001° 22.7183'

All vessels are requested to keep a sharp look out.

Contact details Anna-B:

Mob: : +31612677648
Mail: : master.annab@stemat.com
Vsat: : +31107130524

This Notice to Mariners has been provided by:

G.Gerlagh

T +31 (0) 786417500	Rietgorsweg 4
M+31 (0) 629306887	P.O. Box 282
www.vbms.com	3350AG Papendrecht
g.gerlagh@vbms.com	Netherland



We connect